

# BRIDGEVIEW

## Bolted Hopper Bottom Cones



No highway permits or pilot vehicles. The money you save on transporting may often pay for the assembly.



All components of Bridgeview's bolted hopper bottom cones are either galvanized or powder coated to maintain their great looks. Standard features include rack and pinion crank operated chute with exceptional clearance and a 22" dia. manway.

A 27' dia. cone with a 5 ring hopper bin holds 12,420 bu. and is easily reached with a 70' auger. Exceptional value in hopped storage.

Bridgeview's galvanized, bolted hopper bottom cones are manufactured in 12', 14', 15', 18', 21', 24' and 27' diameters. They are engineered for capacities from 1,400 bu. to 20,000 bu. Remember, the bigger the bin the lower the cost per bushel. Plus, you'll save on set-up time during harvest. Also, when the time is right for a handling system you'll save more money by having fewer bins to tie into the system.




Rack & pinion gate.



Steel foundations available.



22" dia. manway is standard.

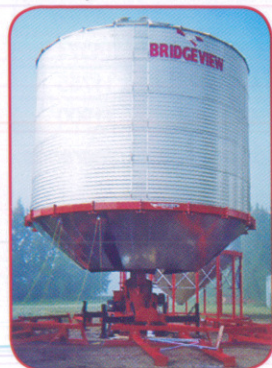


A safer, more efficient way to assemble any bin.

### BIN HOIST



- Assemble any bin, including those with bolt together hopper bottoms, more efficiently with the new Bin Hoist from Bridgeview.
- No cranes or licensed crane operator required.
- Easily towed with 3/4 ton. Incredibly safe and sturdy.



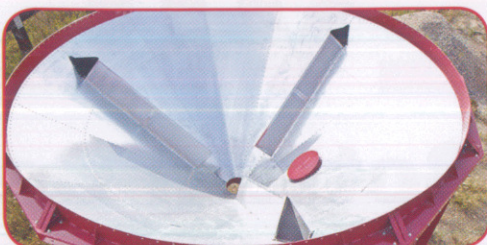

## "JetStream-Air"

- More Efficient
- For Any Hopper



Super efficient. As much as double the drying capacity of conventional hopped aeration. Can out perform full floor systems. Adaptable to any hopper including today's largest hopped bins.

JetStream Air is ideal for natural air drying, supplemental heat drying and cooling.

## SPECIFICATIONS

Model	Deg.	Dia.		Cone Capacity			Legs Size/#of	Gauge of Sheet	Chute Clearance	Hopper Height	Max Bin Size	Hopper Weight
				Bu.	Cu.Ft.	Tonne						
HCB-15-40-S	40	15'	Std.	369	459	10.04	5 x 5/10	14 Gauge	25"	8' 11"	3030 bu.	2763
HCB-15-40-H	40	15'	H.D.	369	459	10.04	5 x 5/10	12 Gauge	25"	8' 11"	5300 bu.	3397
HCB-15-45-S	45	15'	Std.	426	530	11.59	5 x 5/10	14 Gauge	25"	10' 0"	3030 bu.	3917
HCB-15-45-H	45	15'	H.D.	426	530	11.59	5 x 5.10	12 Gauge	25"	10' 0"	5300 bu.	3617
HCB-15-60-S	60	15'	Std.	681	848	18.57	5 x 5/10	14 Gauge	40"	16' 0"	3030 bu.	4330
HCB-15-60-H	60	15'	H.D.	681	848	18.57	5 x 5/10	12 Gauge	40"	16' 0"	5300 bu.	5404
HCB-18-40-S	40	18'	Std.	617	768	16.82	5 x 5/12	14 Gauge	25"	10' 2"	4420 bu.	3626
HCB-18-40-H	40	18'	H.D.	617	768	16.82	5 x 5/12	12 Gauge	25"	10' 2"	7600 bu.	4657
HCB-18-45-S	45	18'	Std.	716	891	20.65	5 x 5/12	14 Gauge	25"	11' 5"	4420 bu.	3840
HCB-18-45-H	45	18'	H.D.	716	891	20.65	5 x 5/12	12 Gauge	25"	11' 5"	7667 bu.	4968
HCB-21-40-S	40	21'	Std.	958	1191	27.61	5 x 5/14	14 Gauge	25"	11' 5"	6100 bu.	4300
HCB-21-40-H	40	21'	H.D.	958	1191	27.61	5 x 5/14	12 Gauge	25"	11' 5"	10508 bu.	5976
HCB-24-40-S	40	24'	Std.	1296	1613	36.5	5 x 5/16	12/14 Gauge	25"	13' 5"	8050 bu.	8300
HCB-24-40-H	40	24'	H.D.	1678	2088	38.23	5 x 5/16	10 Gauge	31"	14' 1"	13822 bu.	12018
HCB-27-40-S	40	27'	Std.	2241	2789	63.15	5 x 5/18	12/14 Gauge	25"	14' 5"	10300 bu.	10,080
HCB-27-40-H	40	27'	H.D.	2318	2885	63.74	5 x 5/18	10 Gauge	31"	15' 4"	17610 bu.	14374
DTHCB-18-40	40	18'	Std.	617	768	16.82	5 x 5 & I-beam/12	14 Gauge	13' 6"	22' 2"	4425 bu.	11755
DTHCB-18-45	45	18'	Std.	716	891	20.65	5 x 5 & I-beam/12	14 Gauge	13' 6"	23' 5"	4425 bu.	11900

DTHCB models (Drive Through Hopper Cone Bottoms) have 13' 6" of vertical clearance.

Mfg. by:



Available from:

# BRIDGEVIEW

P.O.Box 4, Hwy. 22 West, Gerald, SK S0A 1B0

PH: 306-745-2711 Fax: 306-745-3364

Email: bmi@sasktel.net

[www.bridgeviewmanufacturing.com](http://www.bridgeviewmanufacturing.com)

Printed in Canada Copyright 2010